

CHCNAV

CI-710

HIGH-PERFORMANCE
IMU SENSOR



NAVIGATION &
INFRASTRUCTURE




HIGH-PERFORMANCE IMU SENSOR

The CI-710 from CHC NAVIGATION is a premium 6-DOF tactical MEMS IMU (Inertial Measurement Unit) designed for demanding applications. This state-of-the-art unit provides precise data on three-axis angular rates, three-axis accelerations and temperature information. Each module undergoes meticulous temperature compensation and turntable calibration at the factory to ensure high, consistent and reliable performance under extreme conditions. The CI-710 adheres to industry-standard dimensions and structure, and connects via an RS422 interface for broad compatibility and adaptability. It also features outstanding accuracy with a bias instability of only 0.5°/h, a fast-sampling rate of up to 1000 Hz and a robust shock resistance of up to 2000 g (0.5 MS sinusoidal half-wave). The CI-710 is particularly suitable for a wide range of applications, including portable SLAM mapping, map acquisition and dynamic positioning.

SPECIFICATIONS

Gyroscope Parameters (1 σ)		Environmental	
Output operating range	± 400 °/s	Storage temperature	-55°C ~ 90°C
Bias instability	0.5°/h (Allan)	Operating temperature	-40°C ~ 85°C
Cross-axis sensitivity	0.02 deg or 0.5‰	Shock impact	2000 g (0.5 ms, half-sine, 3-axis)
Response-3 dB frequency	47 Hz (Max. 260Hz)	Shock resistance	10 g (10 ~ 2 KHz, 3-axis)
Sampling rate	200 Hz (Max. 1000Hz)	Physical and Electrical	
Bias error over temperature	10°/h (-40°C ~ 85°C RMS)	Interface	RS422*1, ExtTrig/PPS_IN*1
Angular random walk	0.1°/√hr	Power supply	4.5 V ~ 5.5 V
Sensitivity error	1.0‰	Power consumption	< 1 W
Non-Linearity	100 ppm	Size	38.6 mm x 44.8 mm x 21.5mm
Accelerometer Parameters (1 σ)		Weight	48 \pm 5 g
Output operating range	± 6 g	* All specifications are subject to change without notice.	
Bias instability	20 μ g (Allan)		
Cross-axis sensitivity	0.02 deg or 0.5‰		
Response-3 dB frequency	47 Hz (Max. 260 Hz)		
Sampling rate	200 Hz (Max. 1000 Hz)		
Bias error over temperature	1.0 mg (-40°C ~ 85°C RMS)		
Angular random walk	0.035 m/s/√h		

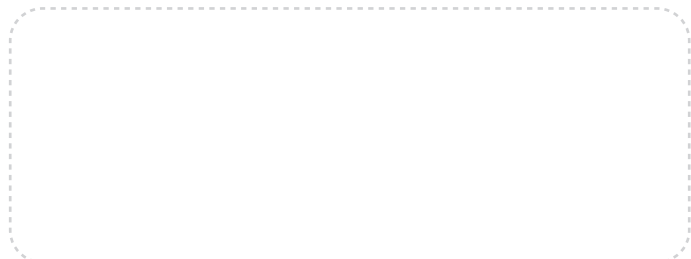

© 2023 Shanghai Huace Navigation Technology Ltd. All rights reserved. The CHCNAV and CHCNAV logo are trademarks of Shanghai Huace Navigation Technology Limited. All other trademarks are the property of their respective owners. Revision September 2023.

WWW.CHCNAV.COM | MARKETING@CHCNAV.COM

CHC Navigation Headquarter
Shanghai Huace Navigation Technology Ltd.
577 Songying Road, Qingpu,
201703 Shanghai, China
+86 21 54260273

CHC Navigation Europe
Infopark Building, Sétány 1,
1117 Budapest, Hungary
+36 20 421 6430
Europe_office@chcnav.com

CHC Navigation USA LLC
6380 S. Valley View Blvd, Suite 246,
Las Vegas, NV 89118, USA
+1 702 405 6578

CHC Navigation India
409 Trade Center, Khokhra Circle,
Maninagar East, Ahmedabad,
Gujarat, India
+91 90 99 98 08 02